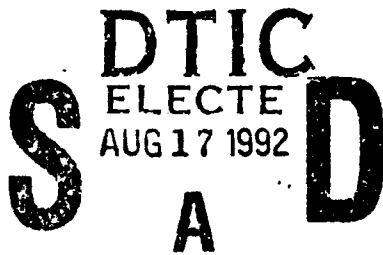WL-TP-92-008

AD-A254 433

Electromagnetic Launcher Control Using Finite State Machines

1Lt Jeffrey M. Gay, Mark W. Heyse, James B. Cornette

Wright Laboratory, Armament Directorate
Analysis and Strategic Defense Division
Electromagnetic Launcher Technology Branch (WL/MNSH)
Eglin AFB FL 32542-5000

DTIC
S ELECTE
AUG 17 1992
A **D**

JULY 1992

FINAL REPORT FOR PERIOD MARCH 1991 - APRIL 1992

92-22778

WRIGHT LABORATORY, ARMAMENT DIRECTORATE

Air Force Systems Command ■ United States Air Force ■ Eglin Air Force Base

92 8 12 024

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government-related procurement, the United States Government incurs no responsibility or any obligation whatsoever. The fact that the Government may have formulated or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication, or otherwise as in any manner construed, as licensing the holder, or any other person or corporation; or as conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This technical report has been reviewed and is approved for publication.

The Public Affairs Office has reviewed this report, and it is releasable to the National Technical Information Service (NTIS), where it will be available to the general public, including foreign nationals.

FOR THE COMMANDER

Even though this report may contain special release rights held by the controlling office, please do not request copies from the Wright Laboratory, Armament Directorate. If you qualify as a recipient, release approval will be obtained from the originating activity by DTIC. Address your request for additional copies to:

> Defense Technical Information Center
> Cameron Station
> Alexandria VA 22304-6145

If your address has changed, if you wish to be removed from our mailing list, or if your organization no longer employs the addressee, please notify WL/MNSH, Eglin AFB FL 32542-5000, to help us maintain a current mailing list.

Do not return copies of this report unless contractual obligations or notice on a specific document requires that it be returned.

REPORT DOCUMENTATION PAGE

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE	3. REPORT TYPE AND DATES COVERED
	July 1992	Final, March 91 - April 92

4. TITLE AND SUBTITLE
Electromagnetic Launcher Control Using Finite State Machines

5. FUNDING NUMBERS
PE 63217C
PR 1203
TA 03
WU 98

6. AUTHOR(S)
1Lt Jeffrey M. Gay, James B. Cornette, Mark W. Heyse,WL/MNSH

WL Program Manager: James B. Cornette (WL/MNSH)

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
Wright Laboratory, Armament Directorate
Analysis and Strategic Defense Division
Electromagnetic Launcher Technology Branch (WL/MNSH)
Eglin AFB FL 32542-5000

8. PERFORMING ORGANIZATION REPORT NUMBER

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
Same as above.

10. SPONSORING/MONITORING AGENCY REPORT NUMBER
WL-TP-92-008

11. SUPPLEMENTARY NOTES
Approved by PA for unlimited release in March 1992, published in the 6th Electromagnetic Launcher Conference proceedings. (Not edited by STINFO Facility.)

12a. DISTRIBUTION/AVAILABILITY STATEMENT
Approved for Public Release; distribution is unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

This paper shows the continued viability of sequential Finite State Machines (FSM s) as a means to control the sequencing of Electromagnetic Launcher (EML) systems. While computer controlled sequencing is an attractive alternative, FSM s are easy to design, inexpensive and reliable. Several FSM controllers are currently in use for the long duration EML experiments at the Hypervelocity Research Facility, Eglin AFB, FL. This paper discusses the basic system design with reference to design procedure and systems interfacing, flexibility, and the fail-safe nature of the FSM (i.e., system interrupt capability) are also discussed. Where requirements include repeatability, reliability, ease of operation, relative low cost, and flexibility, the FSM is presented as a reasonable alternative to more expensive computer-based systems.

14. SUBJECT TERMS
Railgun, Electromagnetic Launcher, Electromagnetic Acceleration

15. NUMBER OF PAGES
11

16. PRICE CODE

17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT
Unclassified	Unclassified	Unclassified	SAR

Electromagnetic Launcher Control
Using Finite State Machines

1LT Jeffrey M. Gay
James B. Cornette
Mark W. Heyse

Wright Laboratory Armament Directorate (WL/MNSH)
Eglin Air Force Base, Florida 32542-5434

Abstract· This paper shows the continued viability of sequential Finite State Machines (FSMs), as a means to control the sequencing of Electromagnetic Launcher (EML) systems. While computer controlled sequencing is an attractive alternative, FSMs are easy to design, inexpensive and reliable.

Several FSM controllers are currently in use for the long duration EML experiments at the Hypervelocity Research Facility, Eglin Air Force Base, Florida. This paper discusses basic system design, with reference to design procedure and systems interfacing. Flexibility, and the fail-safe nature of the FSM (i.e., system interrupt capability) are also discussed. Where requirements include repeatability, reliability, ease of operation, relative low cost, and flexibility, the FSM is presented as a reasonable alternative to more expensive computer based systems.

INTRODUCTION

Before making the decision to sink lots of money into the computers, and associated hardware and software, necessary to control repeated sequencing of Electromagnetic Launchers (EMLs), discrete hardware controllers should be considered. Working from an algorithm describing a sequence of events; a simple, reliable, systems controller can be designed. The number of steps allowed in a complete sequence is unlimited, allowing for flexibility in design, and sequence modification as needed. The heart of any Finite State Machine (FSM) is a memory device, such as a flip-flop, decoder, programmable logic array, or ROM. This allows the designer to choose the device best suited for a given application. The controllers used at the Eglin Hypervelocity Research Facility are based on decoders, sequenced by counters. Here again, there are many devices available for sequence control, with the optimum device determined by the application.

Interfacing a controller to the outside world is another area where the FSM excels. The designer isn't limited to off the shelf devices. At the Eglin facility, interfacing techniques utilize standard electrical connections (BNC) and fiber-optic links, as well as magnetic and inductive pick-ups. The sequences of the machine can also be made available for triggering data acquisition systems, other controllers, video equipment, or any device operating in conjunction with the controller.
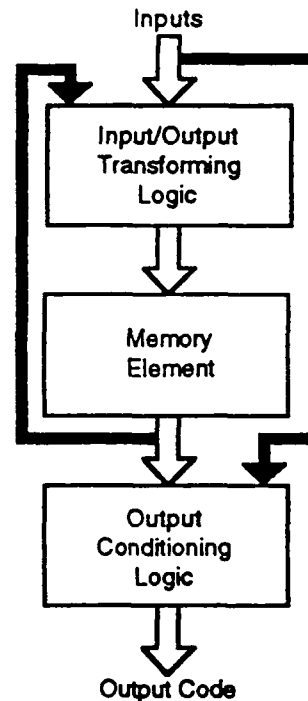
FINITE STATE MACHINES

Fig. 1. General model of a finite state machine.

The heart of any FSM is the memory element. As shown in Fig. 1, it's used to store information related to the past history of the inputs to the system [1]. Fig. 1 also serves as a basic block diagram for the Multiple Sequence Interface/Controller (MSI/C) described in this paper. Designed and built at the Eglin facility, the MSI/C employs a 74LS138 3-line to 8-line Decoder as the memory element. In conjunction with the decoder, Multiplexers (MUXs), combinational logic elements, and flip-flops, are used in the input/output transforming logic. Designing the input/output transforming logic represents most of the work involved in FSM design. However, careful use of Karnaugh maps (K-maps) simplifies the task, yielding a design that minimizes gate usage.

Devices for sequencing the memory element of a FSM include counters, and shift registers. Sequencing of the MSI/C is accomplished with a 74LS160 synchronous 4-bit counter. The normal count rate is 10 MHz, with count and load operations controlled by separate 74LS151 8-bit MUXs. Whenever possible, some form of unit distance code should be employed in the count sequence of a FSM in order to avoid flashing during state changes. This makes the LS160 ideal

for sequencing applications, since it has independent count and load functions. In order for a FSM to function properly, the present state, or count, of the machine must be fed back to the input transforming logic. Through this logic, the next state information for the machine is generated. For the MSI/C, this information is presented to the counter inputs. Thus, using the MUXs to either load the counter, or allow it to count normally, any sequence can be formed. Design of the output conditioning logic depends heavily upon the application at hand. For example, the MSI/C uses numerous fiber-optic transmitters. With each transmitter pulling 30 mA to 60 mA, buffers and line drivers are employed as drivers and predrivers before final output.

DESIGNING A FSM

Designing a FSM can be difficult unless a structured approach is taken. However, following some basic rules will result in a system that works with little to no debugging. Reference [1] suggests a 10 phase algorithm for FSM design. This can usually be cut to 7 phases, as follows: (1) Define the purpose and role of the system, (2) Define the basic operations and limitations of the system, (3) Using timing diagrams, define the timing and frequency of the system level input and output control signals, (4) Detail the sequential behavior of the system controller, (5) Develop a Mnemonic Documented State (MDS) diagram for controller operation using phases 1, 2, 3, and 4 as reference, (6) Choose a system controller architecture and, (7) Use suggested rules and constraints to make state assignments [1], [2].

Fig. 2. MDS diagram for the MSI/C.

ACTUAL CONTROLLER DESIGN

The MSI/C arose from the requirement for multiple discharges of the Eglin 5 MJ power supply, with adjustable inter-discharge delay times from 200 ms to 5 s. From this requirement, and working with the test engineer, an algorithm for the controller was developed. Since the events that take place before, during, and after the discharge of the power supply are sequential and repeating in nature, a FSM was the logical choice for controlling the process. Originally designed to be an interface, the unit is a fully functional controller that performs as an interface.

Following the previously mentioned design phases, block diagrams, flow diagrams, and timing diagrams were constructed to determine the sequential behavior of the controller. In designing a system of any kind, elegance and simplicity mean reliability. With that in mind, a go-no-go construct was sought, to reduce the possibility of timing problems in the final product. Put simply, the go-no-go structure is the epitome of sequential machine design. In such a system, all actions are predicated on the completion of a previous action (or actions). If the conditions for transitioning to the next machine state are not met, the machine simply idles until they are. This is especially attractive where EMLs are concerned, as the energy levels used can be quite destructive if not properly controlled. For ex-
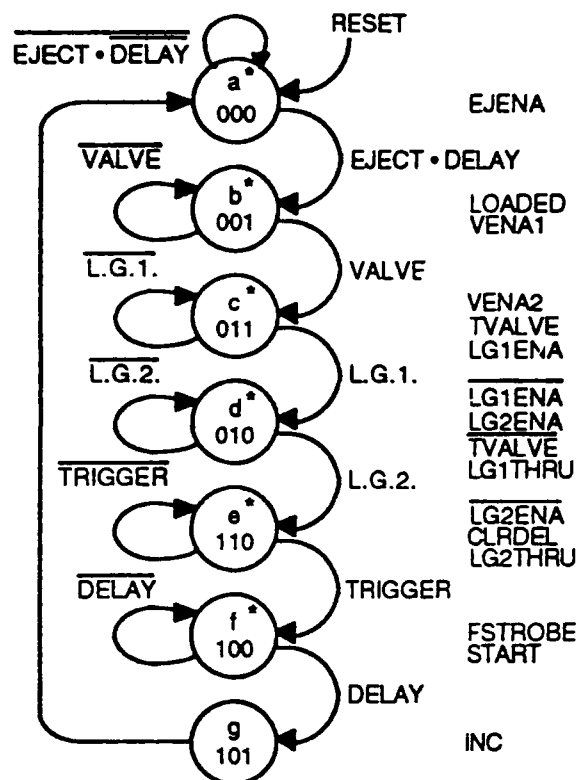
ample, at the Eglin facility, in order to avoid voltage breakdown at the breech of a launcher, or system discharge at the instant a projectile reaches the breech, the velocity of the projectile is used to determine a delay time before energy transfer. Delay time calculation is handled by the controller, and energy transfer cannot take place until the delay is satisfied. Past experience has shown that transferring energies in the Megajoule range can be catastrophic for an empty launcher, making this FSM capability invaluable.

Fig. 2 shows the MDS diagram for the MSI/C. The go-no-go construct is evident where the states (each bubble represents a machine state) loop back on themselves. This represents an idle condition, where the machine is waiting for the conditions for transitioning to be met. Note the unit distance sequencing, as only one bit changes for any given transition (except the last one). The mnemonic at each transition arrow indicates the action causing the transition, while the information to the right of each bubble indicates actions taking place while in a given state. Each state is also given a letter. These letters are used in the "state" K-map, as an aid in filling out the rest of the K-maps. Some of the actions in a FSM of this type will be asynchronous and/or conditional in nature. These are indicated with an asterisk in the MDS diagram. It is easy to see the value of the MDS diagram as a design or troubleshooting aid. A well documented MDS diagram completely explains the operation of the machine. Fig. 3 shows the three sets of K-maps needed

2

to complete the design of the MSI/C. This set of maps is typical for any FSM of similar architecture. In Fig. 3, the "action" and "state" maps are used as aids in completing the rest of the maps. The "state" map is a 2-by-4 map with the letters from the state bubbles entered as determined by the sequencing code. The "action" map contains descriptors for the operations that cause state to state transitions in the machine. For example, a conditional count takes the machine from state 000 to 001. Thus, a CC is entered in the 000 box of the 2-by-4 K-map. Similarly, since the transition from 001 to 011 in a conditional branch, a BC is entered in the 001 box. Unconditional branching is indicated with a BU.

Since the MSI/C employs two MUXs in generating its sequence, each requires a K-map to determine the proper MUX inputs. Using the action map as a guide, the "count enable" and "load" maps are constructed. The count enable map is built by replacing all CC entries with the logic function desired before the count can be allowed. Similarly, all BC entries are replaced with the proper logic function, in a separate "load" map. The logic functions are taken directly from the MDS diagram.

Finally, parallel data maps are generated to determine the logic needed to convert the present state of the machine into next state information. This is fed to the counter inputs, insuring that the desired sequence is generated. A single K-map is made for each counter bit. Since only three bits are used in the MSI/C sequence, one of the maps is redundant. However, it takes little time to construct, and may come in handy for future system modifications. Filling in the parallel data maps is started by entering "don't cares" (<d>) for all CC entries from the action map. When a transition results in a change in any given bit (e.g., 1 to 0, or 0 to 1), a "1" is entered into the map. If no change occurs, a "0" is entered. As shown under each map, solving the parallel data maps yields the minimized logic needed for generation of the next state information. Thus, by following the phases discussed earlier, the controller design is complete (except for interfacing), and easily read from the K-maps, in conjunction with the chosen system architecture. Note that, by cascading counters, MUXs, and decoders, any length sequence can generated. Indeed, devices can be inserted for future expansion, and strapped in as needed. For the MSI/C, many of the MUX inputs are unused. Thus, as future needs arise, there is built in flexibility to expand. Such flexibility is characteristic of a FSM designed around the go-no-go construct. If the controller is a wire-wrapped prototype, changes can be made on the spot. Once the prototype is a proven performer, circuit boards can be made, still leaving room for modifications.

With the FSM, interfacing options are also unlimited. In the MSI/C, all inputs are fiber-optic. Outputs reaching the high energy environment of the launchers are also fiber-optic. Electrical signals used to trigger the DAS and record controller state information are optically isolated from the controller, and battery powered on the DAS side. Such optical isolation keeps the control electronics separate from the noisy EML environment. However, to insure compatibility with older systems, parallel electrical connections are available for

STATE

CB\A	00	01	11	10
0	a*	d*	e*	f*
1	b*	c*	<d>	g

ACTION

CB\A	00	01	11	10
0	CC	BC	BC	CC
1	BC	BC	<d>	BU

COUNT ENABLE

CB\A	00	01	11	10
0	EJ & DEL	<d>	<d>	$\overline{DEL}$
1	<d>	<d>	<d>	<d>

LOAD

CB\A	00	01	11	10
0	0	LG2	TRIG	0
1	VAL	LG1	<d>	1

CB\A	00	01	11	10
0	<d>	0	0	<d>
1	0	0	<d>	0

$$D = 0$$

CB\A	00	01	11	10
0	<d>	1	1	<d>
1	0	0	<d>	0

$$C = \overline{Q}_A$$

CB\A	00	01	11	10
0	<d>	1	0	<d>
1	1	1	<d>	0

$$B = \overline{Q}_C$$

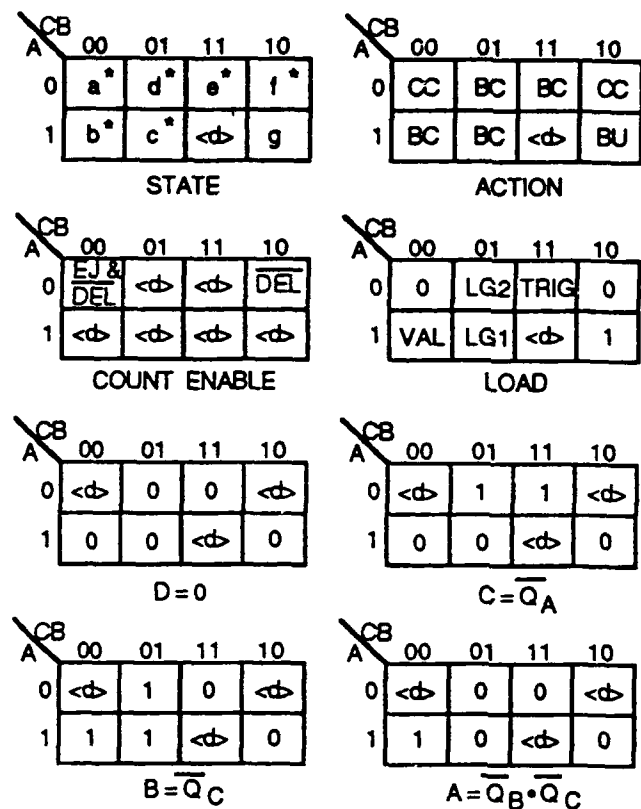| CB\A	00	01	11	10
0	<d>	0	0	<d>
1	1	0	<d>	0

$$A = \overline{Q}_B \cdot \overline{Q}_C$$

Fig. 3. MSI/C K-maps.

critical input, and output functions.

The basic controller portion of the MSI/C is shown in Fig. 4. The MUX inputs are taken directly from the count enable, and load K-maps. For each "0," the input is grounded. Where a "1" appears, the input is tied to +5 V. The rest of the inputs, interfaced from the outside world, are applied either directly to the MUXs or routed through the appropriate logic ahead of the MUX inputs.

This structured approach to FSM design results in an elegant, easy to understand documentation package. Referring to the MDS diagram (Fig. 2), the sequence of events is easily traced on the controller schematic (Fig. 4). By monitoring the states of the controller during launcher operation, a time reference is established for every event. If problems arise during launcher sequencing, correlation of the machine state with the suspicious event can often lead to quick solutions of problems that might otherwise be difficult to troubleshoot. By the same token, such signal monitoring may indicate the need for sequence modifications within the controller. This synergistic relationship between the controller and the outside world is probably the best reason for using FSMs to control EML operations.
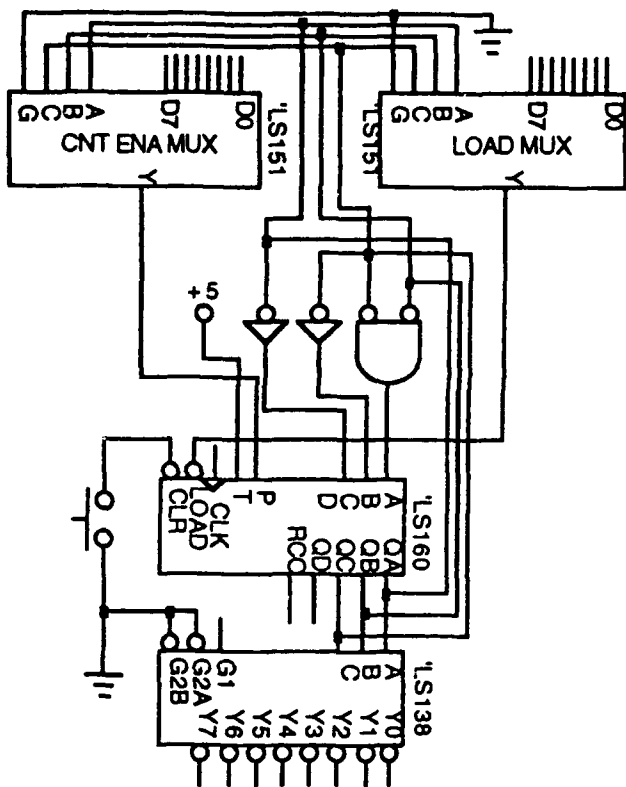
3

Fig. 4. Basic controller section of the MSI/C.

REFERENCES

[1] William I. Fletcher, "An engineering approach to digital design." New Jersey: Prentice-Hall, Inc., 1980.

[2] Clare, Christopher R., "Designing logic systems using finite state machines." New York: McGraw-Hill, 1973.

Defense Tech Info Center
Attn: DTIC-DDAC
Cameron Station
Alexandria VA 22304-6145
2

AUL/LSE
Maxwell AFB AL 36112-5564
1

AFSAA/SAI
The Pentagon, Room 1D363
Washington DC 20330-5420
1

Eglin AFB FL 32542-5000

WL/CA-N   1
WL/MNOI (Scientific & Tech. Info.   1
Facility)
WL/MNSH   4
AFDTC/PA   1

WL/FIES/SURVIAC
Wright Patterson AFB OH 45433-6553
1

HQ USAFE/INATW
APO NY 09012-5001
1

DARPA/TTO
Tactical Technology Office
Attn: Mr. Peter Kemmy
1400 Wilson Blvd.
Arlington VA 22209-2308
1

Naval Surface Weapons Center
Attn: Mr. P. T. Adams, Code G-35
Dahlgren VA 22448
1

SDIO/TNC
Attn: Mr. Mick Blackledge and
          Maj Donna Stromecki
Washington DC 20301-7100
1

SDIO/TNI
Attn: Dr. Dwight Duston and
          Lt Col Pedro Rustan
Washington DC 20301-7100
1

U.S. Army Strategic Defense Command
Attn: DASD-H-Q (Lt Col Steven Kee)
P.O. Box 1500
Huntsville AL 35807-3801
1

U.S. Army, ARDEC
SMCAR-FSE, Bldg 329
Attn: Mr. Tom Coradeschi and
          Dr. Thaddeus Gora
Picatinny Arsenal NJ 07806-5000
1

U.S. Army Ballistic Research Laboratory
SLCBR-TB-EP
Attn: Dr. John Powell
Aberdeen Proving Ground MD 21005
1

WL/POOX
Attn: Dr. Charles E. Oberly
Wright Patterson AFB OH 45433-6553
1

Auburn Research Foundation
Office of the Vice Pres. for Research
Attn: Ms. Barbara Ausharian
202 Samford Hall
Auburn University AL 36849-5160
DAL: 29335; CCAL: 0001689
1
Route to Drs. R. F. Askew (Dir., Leach
Nuclear Science Ctr.) and E. J. Clothiaus
(Dept. of Physics)

GA Technologies, Inc.
Attn: Mr. Charles N. Stem
P.O. Box 85608
San Diego CA 92138
DAL: 06785; CCAL: 0002129
1
Route to Drs. Robert Bourque and
L. Holland

General Dynamics Pomona Division
Attn: Ms. Dottie Patterson
1675 W. Mission Blvd.
Pomona CA 91769-2507
DAL: 01461; CCAL: 0001182
1
Route to Dr. Jaime Cuadros

Boeing Aerospace Company
Attn: Mr. David Wilson
P.O. Box 3999
Seattle WA 98124-2499
DAL: 27984; CCAL: 0005729
1
Route to Dr. J. E. Shrader

Electromagnetic Launch Research, Inc.
Attn: Mr. Thomas R. Fradette
2 Fox Rd.
Hudson MA 01749
DAL: 28861; CCAL: 0001587
1
Route to Drs. Henry Kolm and
Peter Mongeau and Mr. William Snow

IAP Research, Inc.
Attn: Mr. David P. Bauer
2763 Culver Ave.
Dayton OH 45429-3723
DAL: 28548; CCAL: 0000927
1
Route to Dr. John P. Barber

Lawrence Livermore Natl. Lab
Attn: Ms. Jean Higby
P.O. Box 808
Livermore CA 94550
DAL: 06635; CCAL: 0001362
1
Route to Dr. R. S. Hawke, L-156

Los Alamos Natl. Laboratory
Attn: Mr. Jack Carter, Report Librarian
P.O. Box 1633, MS-P364
Los Alamos NM 87545
DAL: 31455; CCAL: 0001652
1
Route to Drs. Jerry V. Parker and
L. A. Jones

LTV Aerospace and Defense Co.
Attn: Ms. Sherry D. Siler
P.O. Box 650003
Dallas TX 75265-0003
DAL: 00368; CCAL: 0000997
1
Route to Drs. Michael M. Tower and C. H.
Haight (M/S TH-83) and Mr. George L. Jackson

Maxwell Laboratories
Attn: Ms. Linda N. Thomas
8888 Balboa
San Diego CA 92123
DAL: 19248; CCAL: 0001705
1
Route to Drs. Rolf Dethlefson and
Ian McNab and Mr. Mark Wilkinson

General Research Corporation
Attn: Ms. Carol Donner
P.O. Box 6770
Santa Barbara CA 93160-6770
DAL: 10824; CCAL: 0000358
1
Route to Dr. William Isbell

GT Devices
Attn: Ms. Ada Burnette
5705 General Washington Dr.
Alexandria VA 22312
DAL: 29785; CCAL: 0001427
1
Route to Drs. Doug Witherspoon, Shyke
Goldstein, and Rodney L. Burton

NASA Lewis Research Center
Attn: L. T. Jarabek, Library
21000 Brookpark Rd.
Cleveland OH 44135
DAL: 00075; CCAL: 0007346
1
Route to Ms. Lynette Zana, MS 501-7

Pacific-Sierra Research Corp.
Attn: Ms. Celia A. Griffin
Suite 1100, 1401 Wilscn Blvd.
Arlington VA 22209
DAL: 23323; CCAL: 0002150
1
Route to Dr. Gene E. McClellan

R&D Associates
Attn: Data Custodian
P.O. Box 92500
Los Angeles CA 90009
DAL: 12415; CCAL: 0001219
1
Route to Dr. Peter Turchi

SAIC Advanced Concepts Division
Attn: Ms. Bethany Madden
1519 Johnson Ferry Rd., Suite 300
Marietta GA 30062
DAL: 32383; CCAL: 0009775
1
Route to Dr. Jad Batteh and Messrs W. Smith
and L. Thornhill

SAIC
Attn: Mrs. Susan Deonarine
1427 N. Eglin Parkway
Shalimar FL 32579
DAL: 31327; CCAL: 0011312
1
Route to Mr. Floyd Graham and
Drs. Josh Kolawole, Glenn Rolader, and
Keith Jamison

MER Corporation
Attn: Data Custodian
7960 S. Kolb Rd.
Tucson AZ 85706
DAL: 31889; CCAL: 0003169
1
Route to Ms. Lori Leaskey and
Dr. R. Loutfy

SPARTA
Attn: Mr. James Poon
9466 Towne Centre Dr.
San Diego CA 92121-1964
DAL: 28397; CCAL: 0001185
1
Route to Dr. Michael M. Holland
and Mr. Stuart Rosenwasser

System Planning Corporation
Attn: Ms. Phyllis W. Moon
1500 Wilson Blvd.
Arlington VA 22209
DAL: 20874; CCAL: 0000279
1
Route to Mr. Donald E. Shaw

University of Alabama in Huntsville
Research Security Office
Attn: Ms. Gladys B. Jones
P.O. Box 18381
Huntsville AL 35804-8381
DAL: 28339; CCAL: 0002821
1
Route to Dr. C. H. Chen

University of Tennessee
Space Inst/Library
Attn: Ms. Marjorie Joseph
Tullahoma TN 37388-8897
DAL: 15965; CCAL 0000429
1
Route to Dr. Dennis Keefer

Sandia National Laboratory
Attn: Technical Library
P.O. Box 5800
Albuquerque NM 87185
DAL: 23683; CCAL: 0001104
1
Route to Drs. Maynard Cowan (Dept 1220)
and Jim Asay

University of Texas
Center for Electromechanics
Balcones Research Center
Attn: Ms. Marcie Powell
P.O. Box 200668
Austin TX 78720-0668
DAL: 00111; CCAL: 0005531
1
Route to Prof. William Weldon and
Mr. Raymond Zowarka

Westinghouse Elec. Corp, Marine Div.
Technical Library EE-5
Attn: Riet Blei
P.O. Box 3499
Sunnyvale CA 94088-3499
DAL: 06933; CCAL: 0000703
1
Route to Drs. Dan Omry and Hugh Calvin

Westinghouse Electric Co.
Science & Technology Center Library
Attn: Ms. Dee Hanko
1310 Beulah Rd.
Pittsburgh PA 15235
DAL: 00415; CCAL: 0000704
1
Route to Dr. Bruce Swanson

W. J. Schaffer Associates, Inc.
Attn: Data Custodian
321 Billerica Rd.
Chelmsford MA 01824-4191
DAL: 32309; CCAL: 0001458
1
Route to Dr. George I. Kachen